



内冷丝锥夹套TC型 (中心内冷浮动攻丝刀柄B型、同步攻丝刀柄STC型用)

● 无损油、中心内冷给油型丝锥夹套。

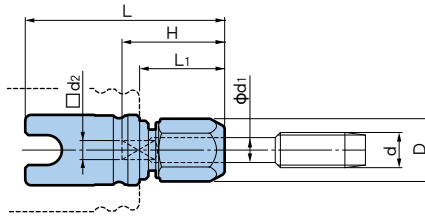

● 型号说明



● TC拆刀器  
便于拆装丝锥夹套

关于TC拆刀器请参阅H1

型号	攻丝范围 d			φ d <sub>1</sub>	□ d <sub>2</sub>	H	L	L <sub>1</sub>	D	质量 (kg)	对应攻丝刀柄
	公制	美制	管用								
TC 8-OM 6 OU1/4	M 6	U1/4	—	6	4.5	34	45.5	22	19	0.05	STC8
-OM 8	M 8	—	—	6.2	5	35					
TC12-OM 6 OU1/4	M 6	U1/4	—	6	4.5	34	60	35	22	0.1	TTB120 STC12
-OM 8	M 8	—	—	6.2	5	35					
-OM10 OU3/8	M10	U3/8	—	7	5.5	36					
-OU7/16 OP1/8	—	U7/16	P1/8	8	6	37					
-OM12	M12	—	—	8.5	6.5	38					
-OU1/2	—	U1/2	—	9	7	39					
TC20-OM 8	M 8	—	—	6.2	5	38	68	30	22	0.2	TTB200 STC20
-OM10 OU3/8	M10	U3/8	—	7	5.5	39					
-OU7/16 OP1/8	—	U7/16	P1/8	8	6	40					
-OM12	M12	—	—	8.5	6.5	41					
-OU1/2	—	U1/2	—	9	7	42					
-OM14 OU9/16	M14	U9/16	—	10.5	8	43					
-OP1/4	—	—	P1/4	11	9	44					
-OU5/8	—	U5/8	—	12	10	45					
-OM16	M16	—	—	12.5	10	46					
-OM18 OU3/4	M18	U3/4	—	14	11	47					
-OP3/8	—	—	P3/8	14	11	48					
-OM20	M20	—	—	15	12	49					
TC30-OM20	M20	—	—	15	12	45	88	42	41	0.5	TTB300 STC30
-OM22 OU7/8	M22	U7/8	—	17	13	50					
-OP1/2	—	—	P1/2	18	14	51					
-OM24	M24	—	—	19	15	52					
-OM27 OU1	M27	U1	—	20	15	53					
-OU1 1/8	—	U1 1/8	—	22	17	54					
-OM30 OP3/4	M30	—	P3/4	23	17	55					

型号的符号说明

- M = 公制螺纹
- U = 美制螺纹
- P = 管用螺纹